

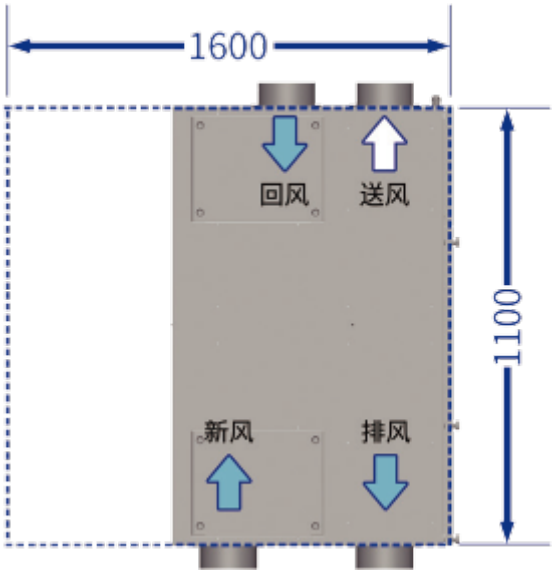
KOMFORT D6B 350 L

Brand new smart air solution for ultra-low energy consumption buildings

- Heat exchanger type: Counter flow
- Control: Wired control panel
- Humidity sensor
- CO2 sensor
- PM2.5 sensor
- Temperature sensor

	Unit of measurement	KOMFORT D6B 350 L
Minimum supply voltage	V	220
Maximum supply voltage	V	240
Power supply frequency	Hz	50
Maximum airflow	m^3/h	350
Heat recovery efficiency, max	%	74
Heat exchanger type	-	Counter flow
Weight	kg	49

Dimensions


1600
回风
送风
1100
新风
排风