

# AERO

## CLASSIC MODELS

### Features



- Wall and ceiling mounting.
- Aero (127-220V/60Hz) series models are equipped with specially designed motors compatible with both 127 V and 220 V power mains.
- Easy maintenance.
- Continuous operation.
- Backdraft damper.
- Ball bearing motor.
- Available in chrome (Aero Chrome) and gold (Aero Gold) decorations.
- 5 year warranty.



**Air flow:**  
up to 309 m<sup>3</sup>/h  
86 l/s



**Power:**  
from 14 W  
**SFP:**  
from 0.28 W/l/s



**Noise level:**  
from 38 dBA



Gold



Chrome



Vintage


### Options





Model	Aero 100/125/150				
Option	S	T	ST	H	SH
Pull-cord switch	•		•		•
Timer		•	•	•	•
Humidity sensor				•	•

- Turn-off delay adjustable from 2 to 30 min.
- Humidity setpoint adjustable from 60 % up to 90 %.

### Overall dimensions and mounting

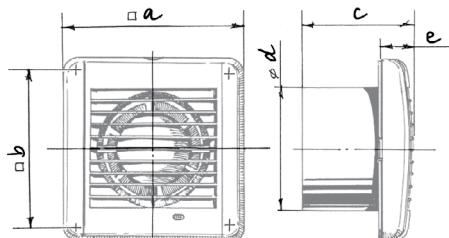

Dimensions [mm]	a	b	c	Ø d	e
Aero 100	144	122	92.5	100	29.5
Aero 125	168	144	97	125	30
Aero 150	198	170	119	150	30



### Designation key

Aero	Gold	100	S	(127-220V/60Hz)
Model	Color	Spigot diameter	Option	Voltage

### Accessories

Duct system	Flexible air ducts	Grilles and hoods	Speed controllers	Clamps

BlauPlast

BlauFlex

Decor, GM


CDT E1.8

MCD 60/0.3


K, KZ

### Technical data

Model	Aero 100	Aero 125	Aero 150
Voltage [V/Hz]	220-240/50	220-240/50	220-240/50
Power [W]	14	16	24
Current [A]	0.085	0.1	0.13
RPM [min <sup>-1</sup> ]	2300	2400	2400
Air flow [m <sup>3</sup> /h (l/s)]	102 (28)	193 (54)	309 (86)
SFP [W/l/s]	0.49	0.3	0.28
Noise level [dBA]	38	39	40

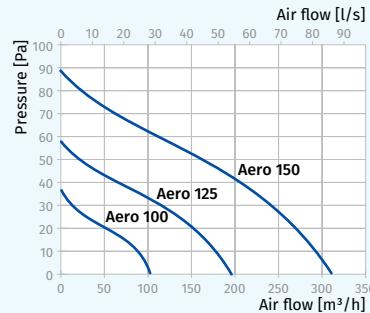

Model	Aero 100 (127-220V/60Hz)	Aero 125 (127-220V/60Hz)	Aero 150 (127-220V/60Hz)
Voltage [V/Hz]	127/60	220/60	127/60
Power [W]	10	9	16
Current [A]	0.115	0.054	0.119
RPM [min <sup>-1</sup> ]	2500	2500	2400
Air flow [m <sup>3</sup> /h (l/s)]	92 (26)	92 (26)	190 (53)
SFP [W/l/s]	0.39	0.35	0.30
Noise level [dBA]	34	34	36



IP34