

AUTO REVERS

CLASSIC MODELS

Features



- o Wall and ceiling mounting
- o Low noise impeller
- o Easy maintenance
- o Continuous operation
- o Automatic shutters
- o Reliable DC motor (12 V) with low energy demand
- o Supplied with a three bottom control unit and 220 V - 12 V transformer
- o 5 year warranty



Air flow:
up to 202 m³/h
56 l/s



Power:
from 5.1 W
SFP:
from 0.15 W/l/s




Noise level:
from 26 dBA



Control


- o Manual:
Three bottom control unit (included into delivery set):

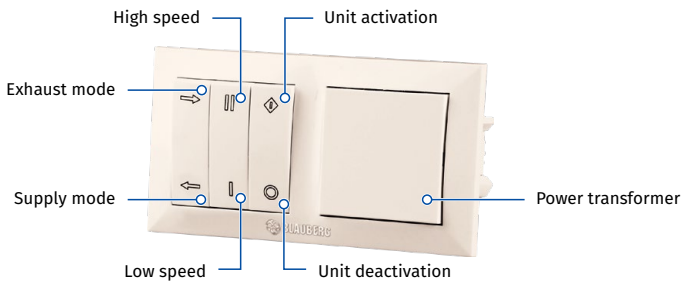

Technical data

Auto Revers 150	Exhaust mode		Supply mode	
	min	max	min	max
Speed				
Voltage [V/Hz]	220-240/50		220-240/50	
Power [W]	5.2	8.7	5.1	7.6
Current [A]	0.025	0.045	0.025	0.045
RPM [min ⁻¹]	1215	1950	1210	2030
Air flow [m ³ /h (l/s)]	123 (34)	202 (56)	110 (31)	187 (52)
SFP [W/l/s]	0.15	0.16	0.17	0.15
Sound pressure level [dBA]*	28	33	26	32


* Sound pressure level measured in free space at a distance of 3 meters from the fan.

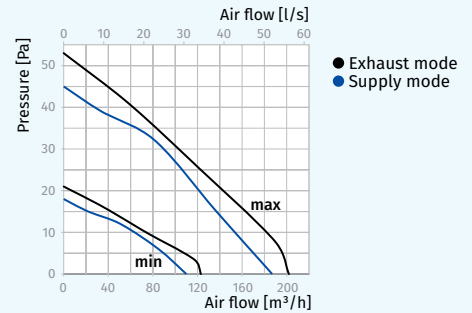

Designation key

Auto	Revers	150
Model	Reversible motor	Spigot diameter

Overall dimensions and mounting

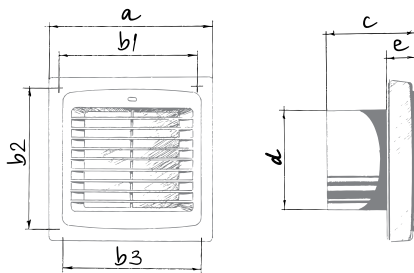

Dimensions [mm]	a	b1	b2	b3	c	Ø d	e
Auto Revers 150	212	150	195	196	114	150	33

- o Fan is designed for indoor mounting on the external wall and is connected to the air duct.
- o Fixation to the wall or ceiling with screws. Flexible air duct is connected to exhaust spigot with a clamp.

Accessories

Duct system	Flexible air ducts	Grilles and hoods	Clamps
BlauPlast	BlauFlex	Decor, GM	K, KZ