


HYBRID

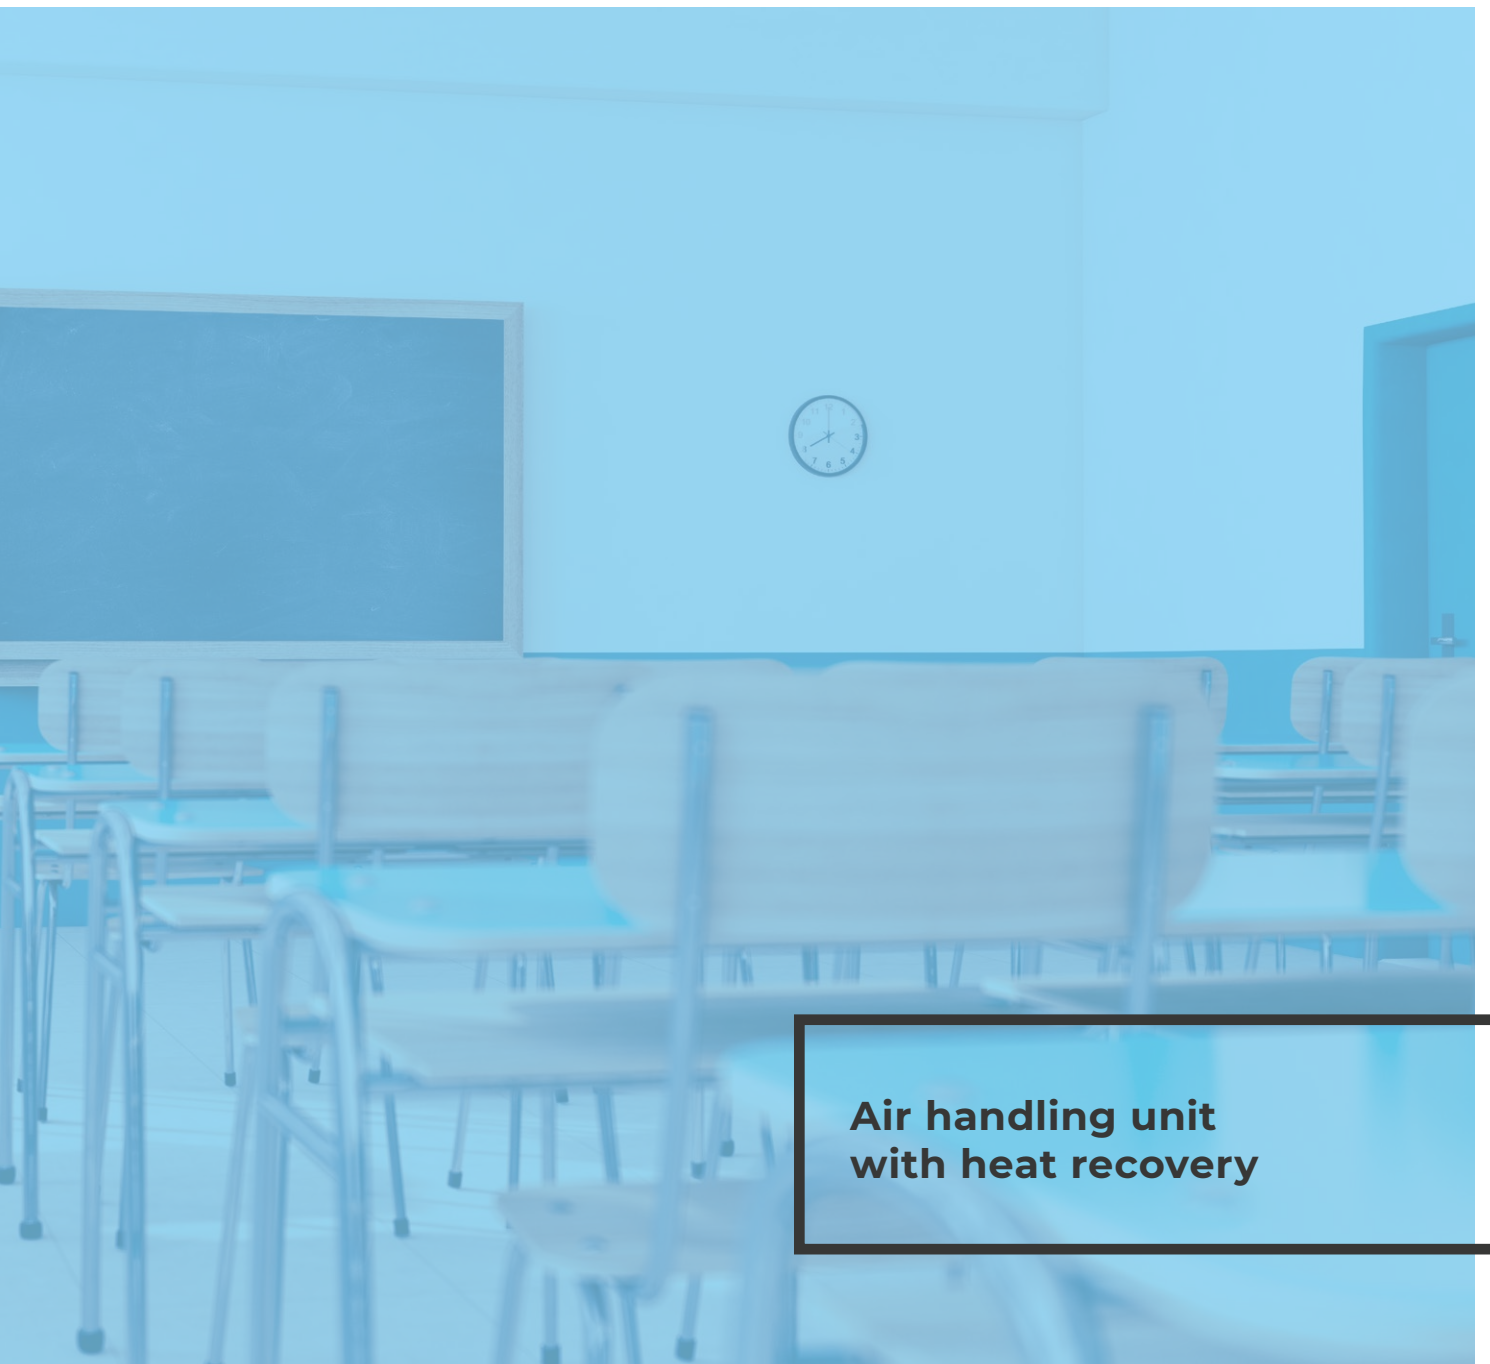

**Air handling unit
with heat recovery**

HYBRID MAX

**DECENTRALIZED UNIT
FOR THE SMALL OFFICES,
FACILITIES, CLASSROOMS
AND LIVING SPACES**



160 m³/h



95 %



32 dB(A)



FEATURES

Efficient decentralized ventilation unit for small offices or conference rooms.

Visible ceiling suspended installation.

A version with electrical preheater is available for cold climate.

Clean air due to the use of an F7 filter for supply air filtration.


Possibility to connect fresh air inlet and exhaust air ducts at top or back side of the unit.

Low noise operation from 16 dB(A) at 3m.


High level of comfort due to built-in bypass and air dampers.



Design

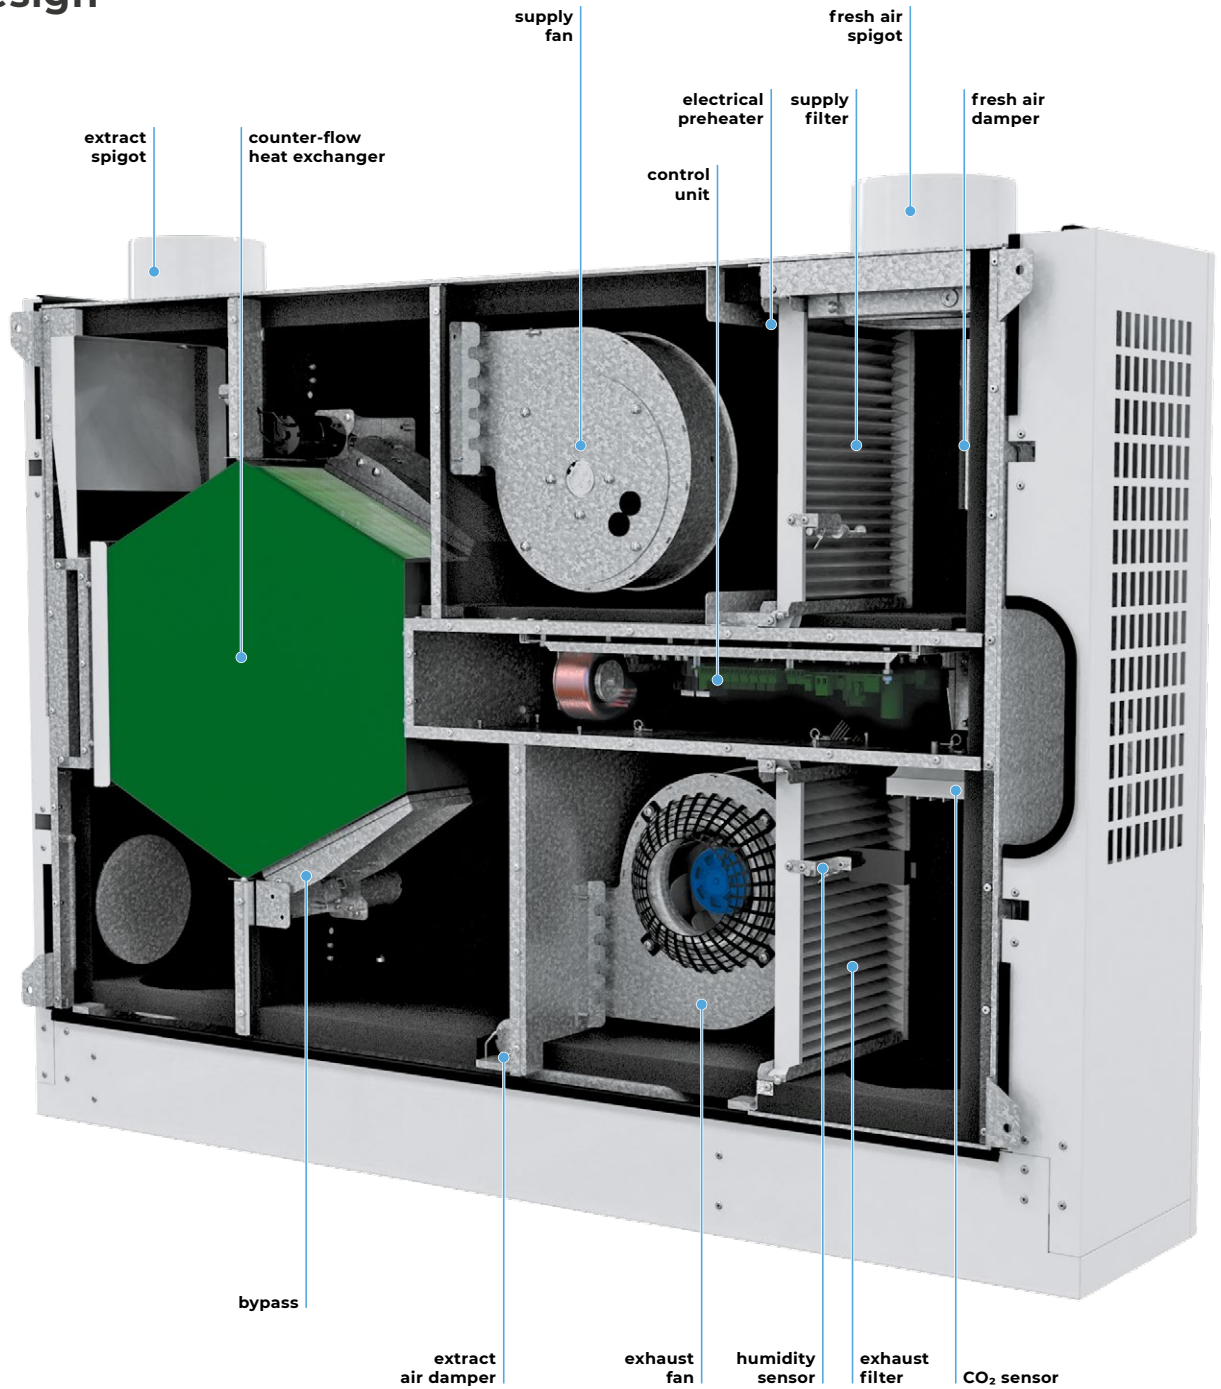

Air distribution

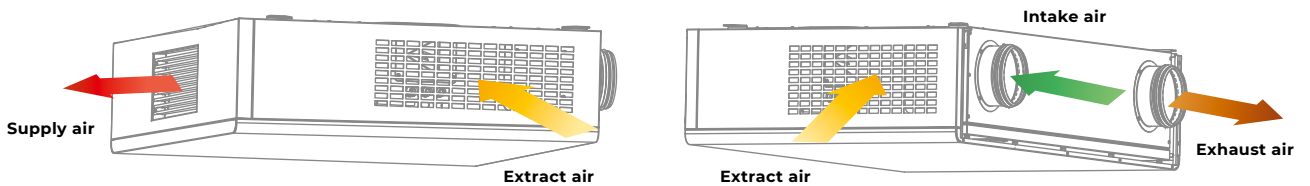

Casing

The casing is made of galvanized sheet metal with white painted decorative cover. The contemporary design of the Hybrid Max unit will seamlessly blend into any interior. The unit is heat- and sound-insulated with a 20 mm layer of foam. The service panel is easy to open for filter maintenance. The unit is equipped with two Ø125 mm spigots for fresh air intake and stale air exhaust. The position of the spigots can be changed from horizontal to vertical.

Air dampers

The **Hybrid Max** unit is equipped with two automatic air dampers, which close automatically when the unit is off to prevent drafts.

Fans



The units feature high-performance, electronically commutated (EC), external rotor motors with forward curved blades. These state-of-the-art units offer excellent energy efficiency. In addition to that, EC motors combine high performance and optimum control over the entire speed range. EC motors have an excellent power efficiency (up to 90 %).

Control and automation

The **Hybrid Max S21** units are equipped with an integrated automation system. The remote control panel is not included in the delivery set (sold separately).

The S21 controller allows integrating the unit into the Smart Home system or **BMS (Building Management System)**.

Unit control via Wi-Fi using the mobile application **Blauberg AHU**.

 <p>Download the Blauberg AHU app for Android</p>	 <p>Download the Blauberg AHU app for iOS</p>	
--	--	---

The **Hybrid Max S14** units are equipped with an integrated automation system and the S14 wall mounted sensor control panel with LED-indication.

Bypass


The **Hybrid Max** units are equipped with a bypass for ventilation (air cooling by the cool air from outside).

Preheating


The **Hybrid Max E S21** units are equipped with an electrical preheater to prevent heat exchanger freezing in the cold climate.

Heat recovery

The **Hybrid Max** unit is equipped with a plate counter-flow polystyrene heat exchanger for heat recovery. The unit condensate is collected and drained to the drain pan under the heat exchanger.

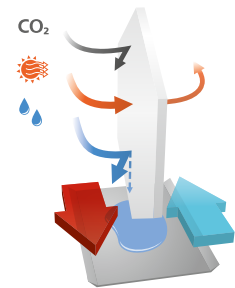

The **Hybrid Max E** unit is equipped with an enthalpy plate counter-flow heat exchanger for energy (heat and humidity) recovery. Due to humidity recovery condensate is not generated in the enthalpy heat exchanger.

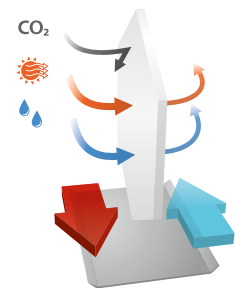





The air flows are completely separated in the heat exchanger. Thus smells and contaminants are not transferred from the extract air to the supply air.

Heat recovery is based on heat and/or humidity transfer through the heat exchanger plates. In the cold season supply air is heated in the heat exchanger by transferring the heat energy of warm and humid extract air to the cold fresh air. Heat recovery minimizes ventilation heat losses and heating costs respectively.




In the warm season the heat exchanger performs reverse and intake air is cooled in the heat exchanger by the cool extract air. That reduces operation load on air conditioners and saves electricity.

Automation functions


Functions	Hybrid Max S21	Hybrid Max S14
Unit control via Wi-Fi using a mobile application	+	-
Unit control via a wired remote control panel	 S22 control panel (option)	 S14 control panel
Unit control via a wireless remote control panel	 S22 Wi-Fi control panel (option)	-
Unit control via a remote wired LCD control panel	 S25 control panel (option)	-
BMS (Building Management System)	RS-485	-
	Wi-Fi	-
	Ethernet	-
	MODBUS (RTU, TCP)	-
Blauberg Cloud Server service	+	-
Speed selection	+	+
Filter replacement indication	by filter timer	by filter timer
	by filter clogging differential pressure switch	LED indication about alarms
Alarm indication	full alarm description in the mobile application	-
Week-scheduled operation	+	-
Bypass	automatic	manual
	manual	-
Timer	+	-
Boost mode	+	-
Fireplace mode	+	using cyclical stops of the supply fan
Freeze protection	through cyclic stops of the supply fan	-
	through preheating (option)	-
Reheater connection	option	-
Cooler connection	option	-
Minimum supply air temperature control	+	option
Humidity control	option	option
CO ₂ control	option	-
VOC control	option	-
PM2.5 control	option	option
Fire alarm sensor connection	option	-

Technical data

Model	Hybrid Max			Hybrid Max E			Hybrid Max ERV			Hybrid Max E ERV		
Voltage [V / 50/60 Hz]	1~ 230						1~ 230					
Max. unit power without electric heater [W]	58						58					
Integrated electric preheater power [W]	-			800			-			800		
Max. unit current without electric heater [A]	0.5						0.5					
Max. unit current with electric heater [A]	-			4			-			4		
Max air flow [m ³ /h]	160						160					
RPM [min ⁻¹]	2800						2800					
Speed [m ³ /h]	60	90	160	60	90	160	60	90	160	60	90	160
Sound pressure level LpA to environment at 1 m [dBA]	25	35	42	25	35	42	25	35	42	25	35	42
Sound pressure level LpA to environment at 3 m [dBA]	16	26	32	16	26	32	16	26	32	16	26	32
Operating temperature [°C]	-25...+40						-25...+40					
Case material	Aluzinc						Aluzinc					
Insulation [mm]	20						20					
Extract filter	Coarse 90% / G4						Coarse 90% / G4					
Supply filter	ePM1 70% / F7 (G4 option)						ePM1 70% / F7 (G4 option)					
Connected air duct diameter [mm]	125						125					
Weight [kg]	47						47					
Heat recovery efficiency [%]	84-95						74-89					
Humidity recovery efficiency [%]	-						47-60					
Heat exchanger type	Counter-flow						Counter-flow					
Heat exchanger material	Polystyrene						Enthalpic membrane					
SEC class	A+						A					

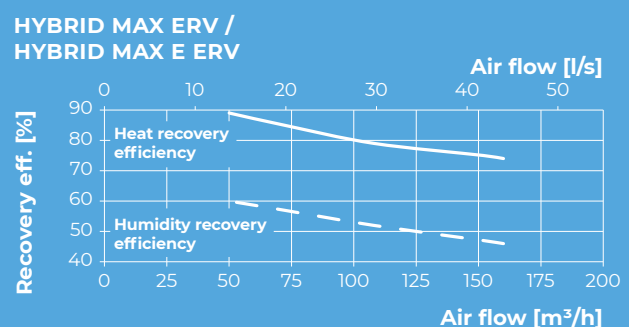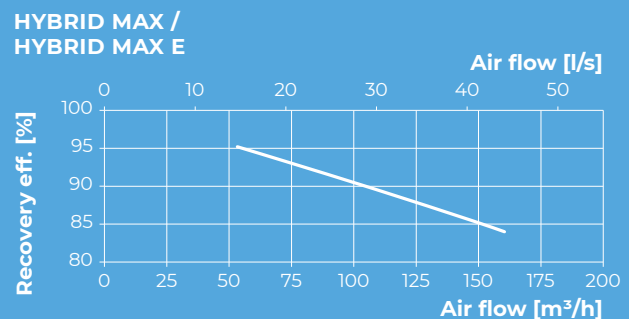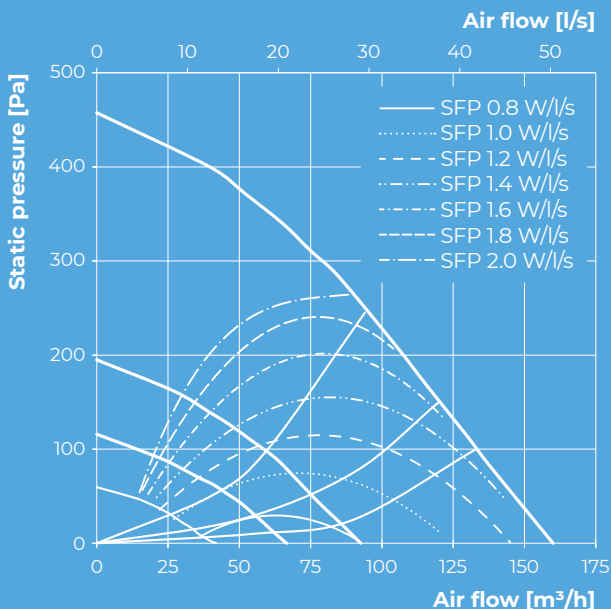

Overall dimensions [mm]

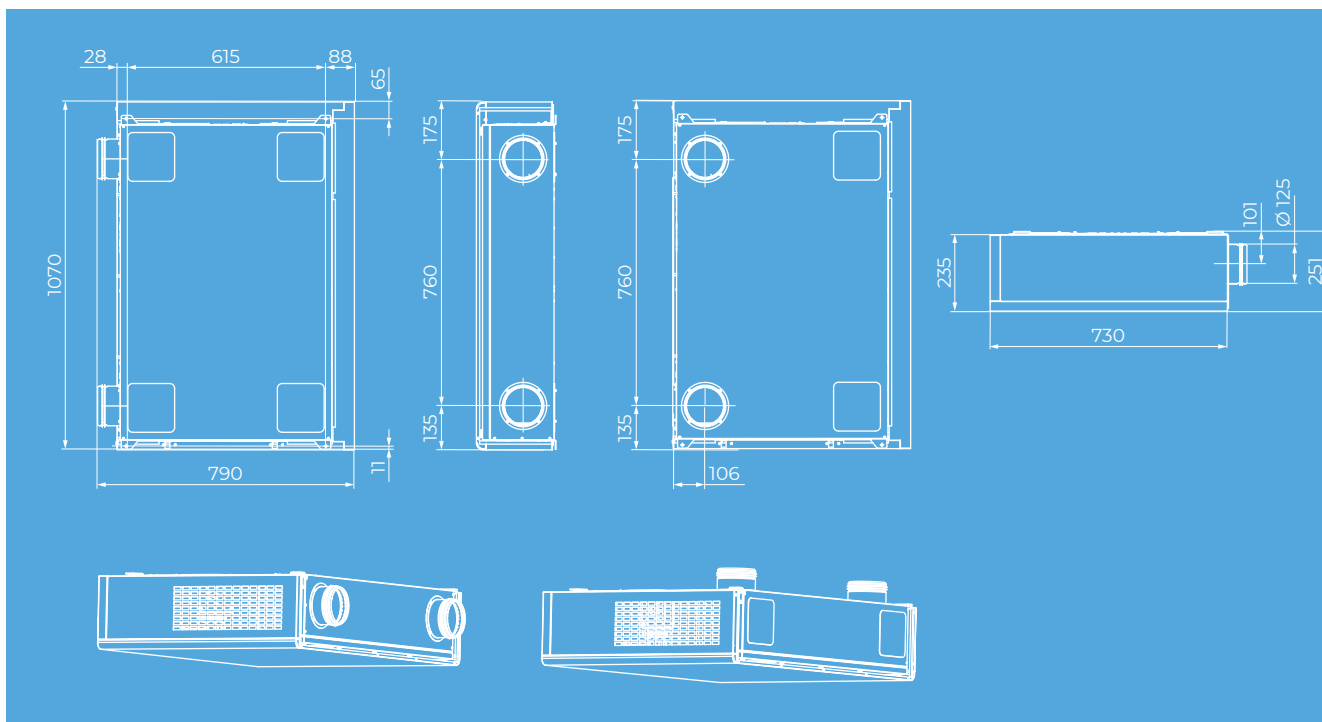

Product range

	Heat exchanger	Air dampers	Preheater	Bypass
Hybrid Max S14	HRV	•		•
Hybrid Max S21		•		•
Hybrid Max E S21		•	•	•
Hybrid Max ERV S14	ERV	•		•
Hybrid Max ERV S21		•		•
Hybrid Max E ERV S21		•	•	•

Mounting

Mounting to the supporting structure.
The spigots pass through the front wall



Mounting through
a suspended ceiling



Mounting to the
supporting structure



Accessories

		Hybrid Max S14 Hybrid Max ERV S14	Hybrid Max S21 Hybrid Max E S21	Hybrid Max ERV S21 Hybrid Max E ERV S21
G4 panel filter		FP 233x175x22 G4	FP 233x175x22 G4	FP 233x175x22 G4
F7 panel filter		FP 233x175x22 F7	FP 233x175x22 F7	FP 233x175x22 F7
Control panel		-	S22	S22
Wireless control panel		-	S22 Wi-Fi	S22 Wi-Fi
LCD control panel		-	S25	S25
Humidity sensor		FS2	FS2	FS2
Humidity sensor		HR-S	HR-S	HR-S
CO₂ sensor		CD-2	CD-2	CD-2
CO₂ sensor with indication		CD-1	CD-1	CD-1
VOC sensor		-	DPWQ30600	DPWQ30600
CO₂ sensor		-	DPWQ40200	DPWQ40200
Humidity sensor		-	DPWC11200	DPWC11200
Outer grille		VDA 125 CFn Al	VDA 125 CFn Al	VDA 125 CFn Al



blaubergventilatoren.de

Blauberg Ventilatoren GmbH
Aidenbachstr. 52
D-81379 Munich
info@blaubergventilatoren.de

Technical changes reserved.
Illustrations and texts are non-binding.

8|2022

