

# BRAVO STILL

SILENT & ENERGY SAVING

## Features



- o Wall and ceiling mounting
- o Easy maintenance
- o Continuous operation
- o Backdraft damper
- o Ball bearing motor
- o Available in chrome (Bravo Still Chrome) and platinum (Bravo Still Platinum) decorations
- o 5 year warranty



**Air flow:**  
up to 235 m<sup>3</sup>/h  
65 l/s



**Power:**  
from 5.6 W  
**SFP:**  
from 0.29 W/l/s



**Noise level:**  
from 26 dBA



Chrome



Platinum


## Options




Model	Bravo Still 100/125/150					
Option	S	T	ST	H	SH	IR
Pull-cord switch	•		•		•	
Timer		•	•	•	•	•
Humidity sensor				•	•	
Motion sensor						•

- o Turn-off delay adjustable from 2 to 30 min.
- o Humidity setpoint adjustable from 60 % up to 90 %.
- o Detection range from 1 up to 4 m.
- o Detection angle up to 100°.

## Overall dimensions and mounting

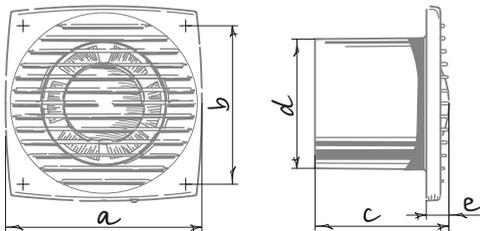


Dimensions [mm]	a	b	c	Ø d	e
Bravo Still 100	150	122	102	100	17
Bravo Still 125	176	144	104	125	17
Bravo Still 150	205	174	124	150	19



## Technical data

Model	Bravo Still 100	Bravo Still 125	Bravo Still 150
Voltage [V/Hz]	220-240/50	220-240/50	220-240/50
Power [W]	5.6	9.3	20
Current [A]	0.04	0.006	0.13
Air flow [m <sup>3</sup> /h (l/s)]	70 (19)	115 (32)	235 (65)
SFP [W/l/s]	0.29	0.29	0.31
Noise level [dBA]	26	31	35



## Designation key

Bravo	Still	Chrome	100	S
Model	Low-noise application	Color	Spigot diameter	Option

## Accessories

### Duct system



BlauPlast

### Flexible air ducts



BlauFlex

### Grilles and hoods



Decor, GM

### Speed controllers



CDT E1.8

MCD 60/0.3

### Clamps



K, KZ