

LUX

WITH DECORATIVE FRONT PANEL AND LIGHTING

Features



- Wall mounting
- Easy maintenance
- Low-noise impeller
- Continuous operation
- Ball bearing motor
- Stainless steel front cover
- Built-in 2W LED-lamp
- 5 year warranty



Air flow:
up to 258 m³/h
72 l/s



Power:
from 14 W
SFP:
from 0.33 W/l/s



Noise level:
from 33 dBA




Options



Model	Lux 100/125/150	
Option	T	H
Timer	•	•
Humidity sensor		•

- Turn-off delay adjustable from 2 to 30 min.
- Humidity setpoint adjustable from 60 % up to 90 %.

Overall dimensions

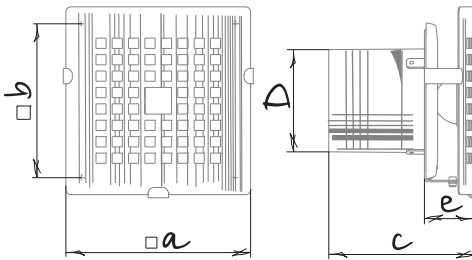


Dimensions [mm]	a	b	c	Ø D	e
Lux 100	180	120	142	100	49
Lux 100 T	182	122	151.6	98	65
Lux 100 H	182	122	151.6	98	65
Lux 125	204	140	152	125	55
Lux 150	230	165	169	150	53

Designation key

Lux	-1	100	T
Model	Panel design	Spigot diameter	Option

Technical data

Model	Lux 100	Lux 125	Lux 150
Voltage [V/Hz]	220-240/50	220-240/50	220-240/50
Power [W]	14	16	24
Current [A]	0.085	0.1	0.13
RPM [min ⁻¹]	2300	2400	2400
Air flow [m ³ /h (l/s)]	89 (25)	164 (46)	258 (72)
SFP [W/l/s]	0.57	0.35	0.33
Noise level [dBA]	33	34	37



Decorative panels



Lux - 1



Lux - 2



Lux - 3



Lux - 4



Lux - 5



Lux - 6

Accessories

Duct system	Flexible air ducts	Grilles and hoods	Speed controllers	Clamps
BlauPlast	BlauFlex	Decor, GM	CDT E1.8 MCD 60/0.3	K, KZ