

# LINE

## CLASSIC MODELS

### Features



- For exhaust ventilation of residential premises
- Wall surface or ceiling mounting
- Low noise impeller
- Easy maintenance
- Continuous operation
- Backdraft damper
- Ball bearing motor



**Air flow:**  
up to 292 m<sup>3</sup>/h  
81 l/s



**Power:**  
from 14 W  
**SFP:**  
from 0.3 W/l/s



**Noise level:**  
from 34 dBA




### Options




Model	Line 100/125/150					
	S	T	TR	ST	H	SH
Option						
Pull cord switch	•			•		•
Turn-on delay timer			•	•	•	•
Turn-off delay timer		•	•	•	•	•
Humidity sensor					•	•

- Turn-on delay timer**
  - Delay time 45 seconds.
- Turn-off delay timer**
  - Adjustable delay from 2 to 30 minutes.
- Humidity sensor**
  - Humidity sensor activation threshold is adjustable from 60 % to 90 %.

### Overall dimensions and mounting

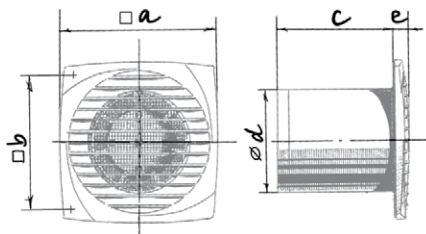


Dimensions [mm]	a	b	c	Ø d	e
Line 100	150	120	109	100	12.5
Line 120	176	140	109	117	12.5
Line 125	176	140	114	125	12.5
Line 150	205	165	132	150	13

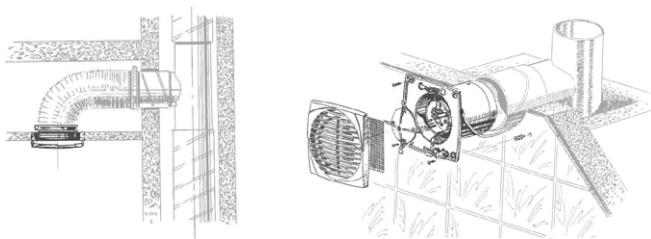

### Technical data

Model	Line 100	Line 120	Line 125	Line 150
Voltage [V/Hz]	220-240/50	220-240/50	220-240/50	220-240/50
Power [W]	14	17	16	24
Current [A]	0.085	0.1	0.1	0.13
RPM [min <sup>-1</sup> ]	2300	2400	2400	2400
Air flow [m <sup>3</sup> /h (l/s)]	95 (26)	174 (48)	180 (50)	292 (81)
SFP [W/l/s]	0.53	0.35	0.32	0.3
Sound pressure level [dBA]*	34	36	35	38

\* Sound pressure level measured in free space at a distance of 3 meters from the fan.



#### Designation key

Line	100	S
Model	Spigot diameter	Option

### Accessories

Duct system	Flexible air ducts	Grilles and hoods	Speed controllers	Clamps
BlauPlast	BlauFlex	Decor, GM	CDT E1.8 MCD 60/0.3	K, KZ