

# TUBO

IN-LINE FANS

## Features



- o Duct mounting
- o Easy maintenance
- o Low noise impeller
- o Continuous operation
- o Ball bearing motor
- o 5 year warranty



**Air flow:**  
up to 295 m<sup>3</sup>/h  
82 l/s



**Power:**  
from 14 W  
**SFP:**  
from 0.3 W/l/s



**Noise level:**  
from 38 dBA




## Options



Model	Tubo 100/125/150
Option	T
Timer	•

- o Turn-off delay adjustable from 2 to 30 min.

## Overall dimensions and mounting


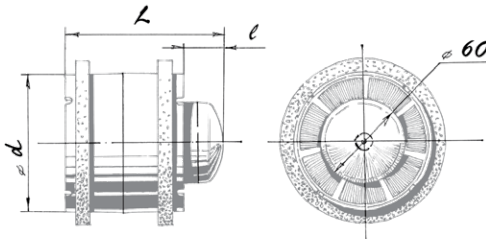


Dimensions [mm]	d	L	l
Tubo 100	99	120	28
Tubo 125	123.5	118	28
Tubo 150	149.5	128	28

## Technical data

Model	Tubo 100	Tubo 125	Tubo 150
Voltage [V/Hz]	220-240/50	220-240/50	220-240/50
Power [W]	14	16	30
Current [A]	0.085	0.1	0.13
RPM [min <sup>-1</sup> ]	2300	2400	2400
Air flow [m <sup>3</sup> /h (l/s)]	102 (28)	195 (54)	295 (82)
SFP [W/l/s]	0.5	0.3	0.37
Sound pressure level [dBA]*	38	39	40

\* Sound pressure level measured in free space at a distance of 3 meters from the fan.

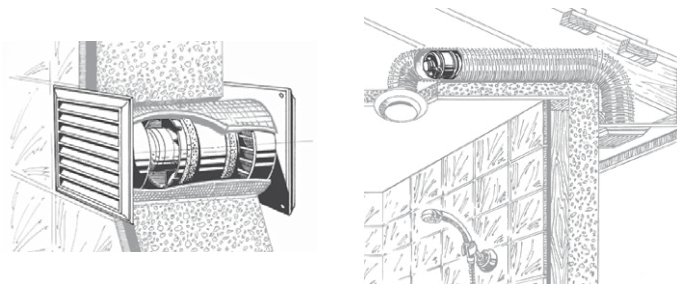

## Fixing bracket

Fan with a mounting bracket for mounting to a horizontal or vertical surface.



Tubo-U

### Designation key

Tubo	-U	125	T
Model	Mounting bracket	Spigot diameter	Option

### Accessories

Air disc valves	Duct system	Flexible air ducts	Grilles and hoods	Speed controllers	Clamps
VPR, VSR, VMR	BlauPlast	BlauFlex	Decor, GM	SGS E1	MCD 60/0.3
					K, KZ